




3/2-way solenoid valve of forged brass body /sub-base mounting for general application

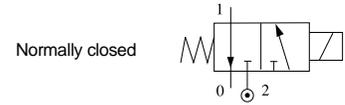


Direct-operated sub-base mounting Type

Model	Orifice (mm)	CV value	Fluid temp. (°C)	Seat disc	Differential pressure kg/cm ² (bar)			Wt. (kg)
					Liquid	Air	Oil (120°C)	
GAB-313-A	1.6	0.09	-10 ~120	NBR Silicone Viton® EPDM PTFE	0-10	0-10	0-10	0.42
GAB-313-B	2.0	0.11			0-7	0-7	0-7	0.42

How to order

GAB - 313 - A - N - E1 - A - 220VAC

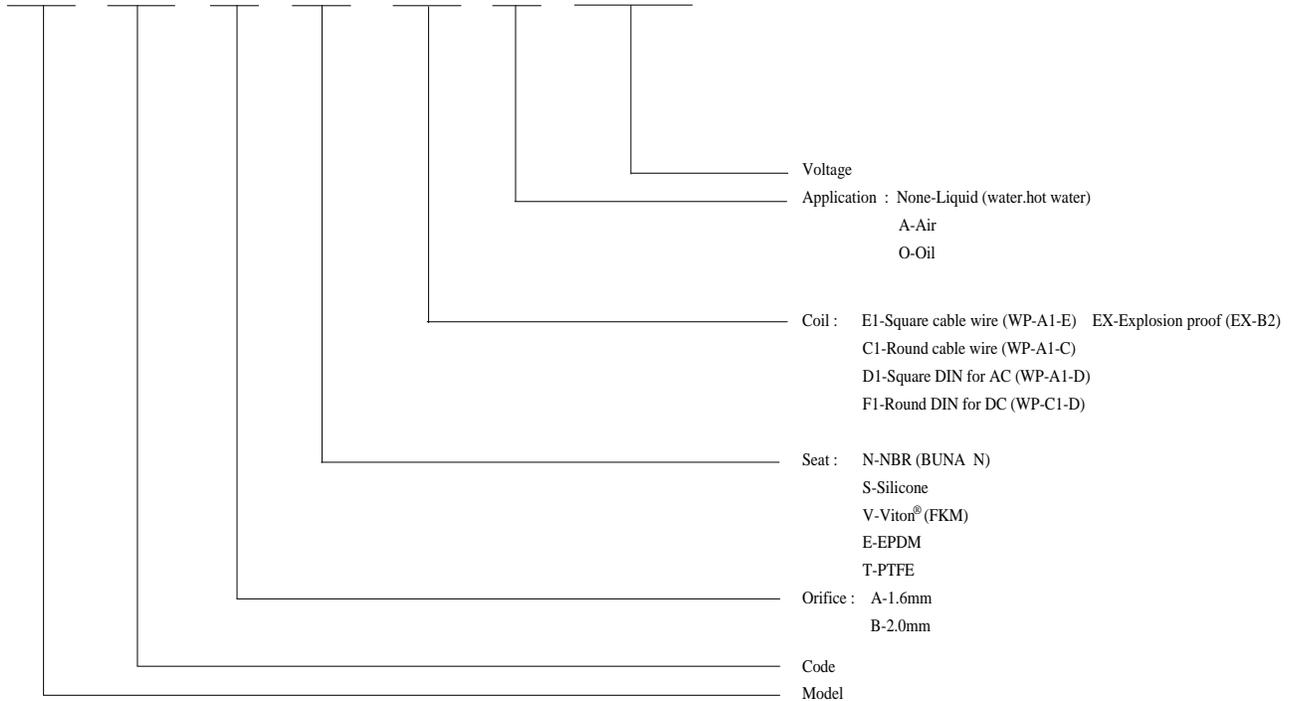

Notes:

1. Voltage drop range is within ±10%.
2. Pressure of voltage DC is 70% of voltage AC only.
3. Selection of coil refer to page 136~139.
4. PTFE seat is custom-made.

Inapplicable Fluids:

1. Fluids that have kinematic viscosity over 50 CST.
2. Fluids that will turn to liquid after being heated and become solid after being cooled.
3. Corrosive fluids.


GAB

3/2-way solenoid valve of forged brass body
/ sub-base mounting for general application


● GAB-313-A~B Contour Specification Chart

Unit:mm

● WP-A1-C COIL

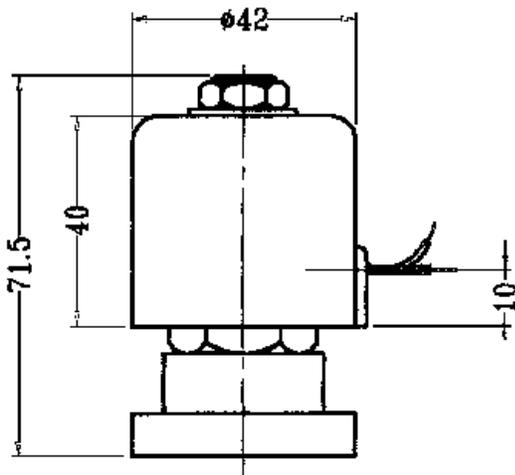

● WP-A1-E COIL

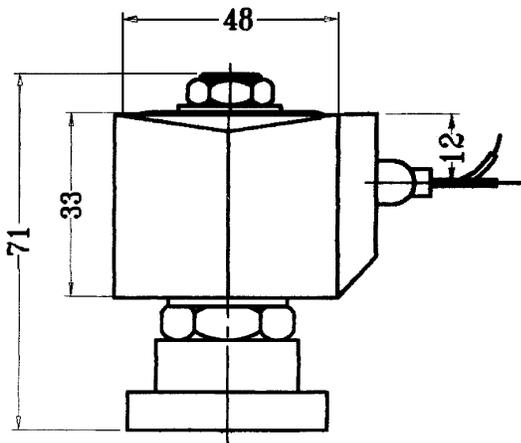

● WP-A1-E COIL

