





5/2-way mechanical valve of aluminum alloy for air application



Model	Port size	Effective Area (mm ²)	CV value	Fluid temp. (°C)	Seat disc	pressure kg/cm² (bar)	Wt. (kg)
						Air	
MV-2252-EB	1/4 "	18	1.0	-10	NBR	1.5~8	0.35
MV-2252-LB	1/4 "	18	1.0			1.5~8	0.35
MV-2252-TB	1/4 "	18	1.0			1.5~8	0.35
MV-2252-PB	1/4 "	18	1.0	60		1.5~8	0.35
MV-2252-PP	1/4 "	18	1.0			1.5~8	0.35


How to order

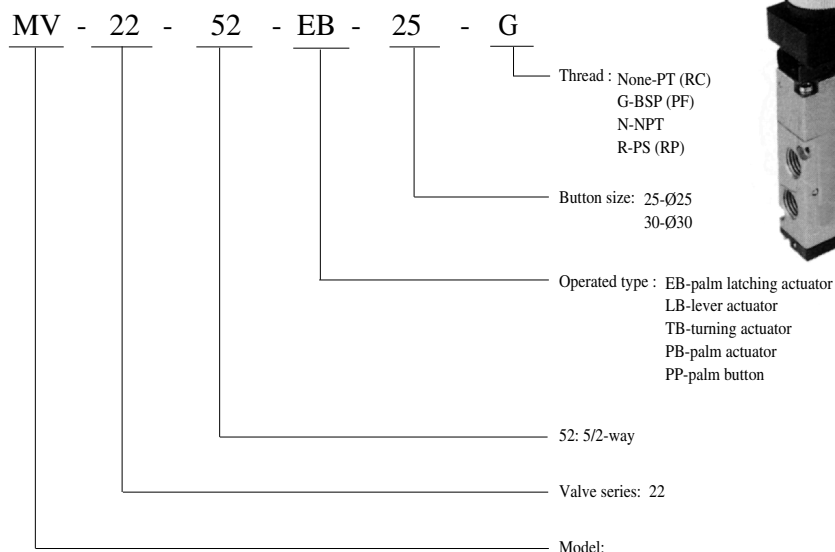

● MECHANICAL VALVES




● MV-2252-***

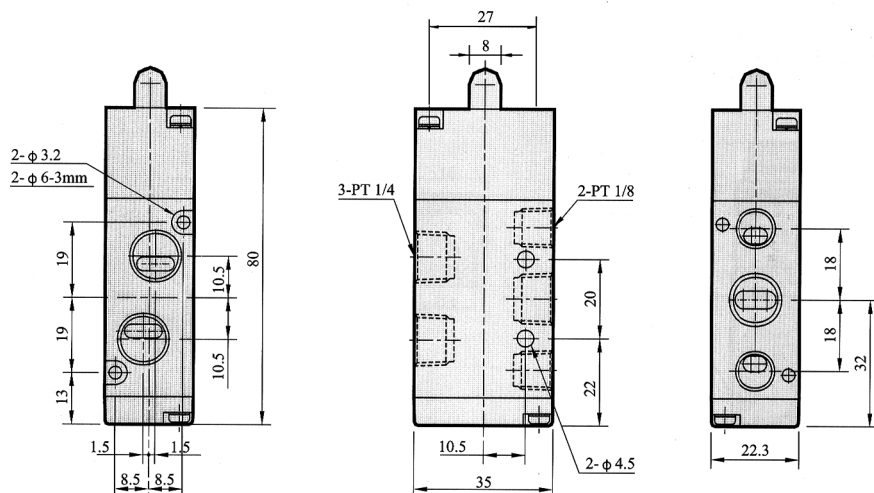


● MECHANICAL VALVES

Unit:mm


● MV-2252-EB-25

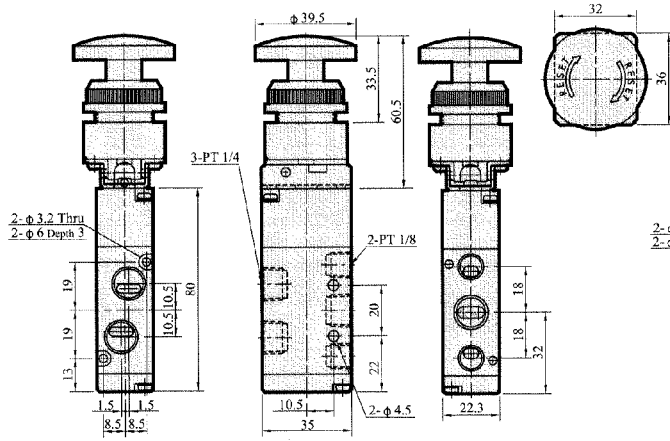


● MV-2252-LB-25

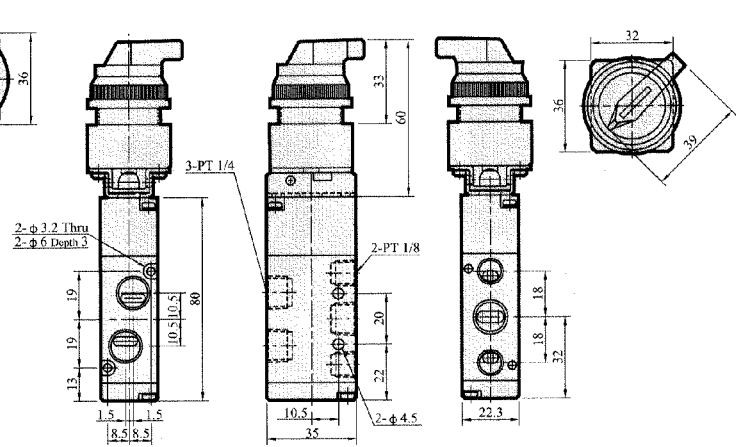


● MV-2252-PP-25

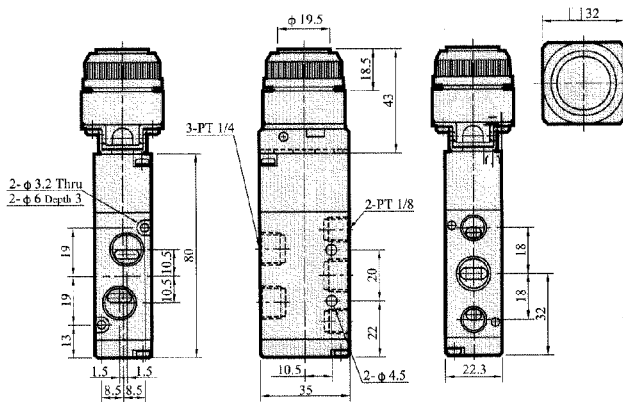

● MV-2252-PB-25

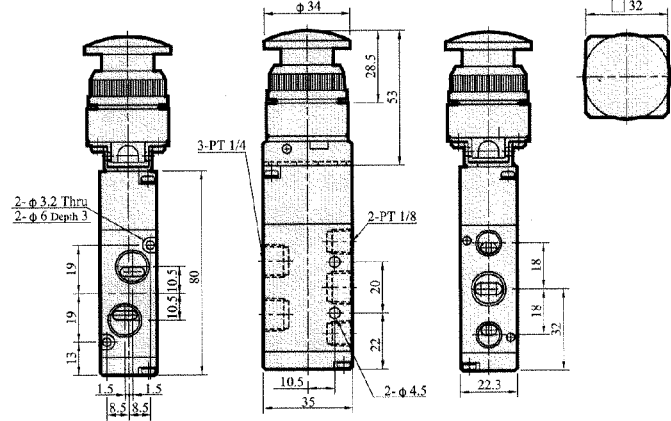


● MV-2252-TB-25

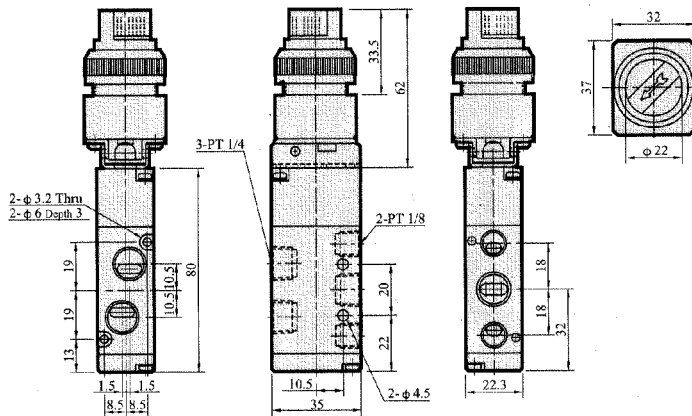



5/2-way mechanical valve of aluminum alloy for air application



Model	Port size	Effective Area (mm ²)	CV value	Fluid temp. (°C)	Seat disc	pressure kg/cm ² (bar)	Wt. (kg)
						Air	
MV-3052-EB	3/8 "	30	1.0	-10 } 60	NBR	1.5~8	0.46
MV-3052-LB	3/8 "	30	1.0			1.5~8	0.46
MV-3052-TB	3/8 "	30	1.0			1.5~8	0.46
MV-3052-PB	3/8 "	30	1.0			1.5~8	0.46
MV-2052-PP	3/8 "	30	1.0			1.5~8	0.46

How to order

● MECHANICAL VALVES

MV - 30 - 52 - EB - 25 - G

Thread : None-PT(RC)
G-BSP(PF)
N-NPT
R-PS(RP)


Button size: 25-Ø25
30-Ø30

Operated type : EB-palm latching actuator
LB-lever actuator
TB-turning actuator
PB-palm actuator
PP-palm button


52: 5/2-way

Valve series: 30

Model

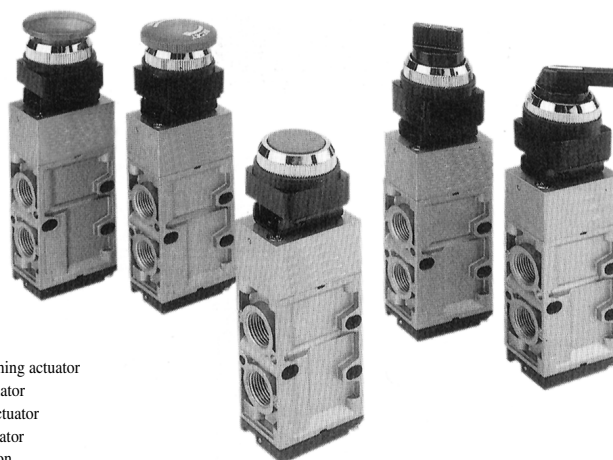


● MV-3052-***

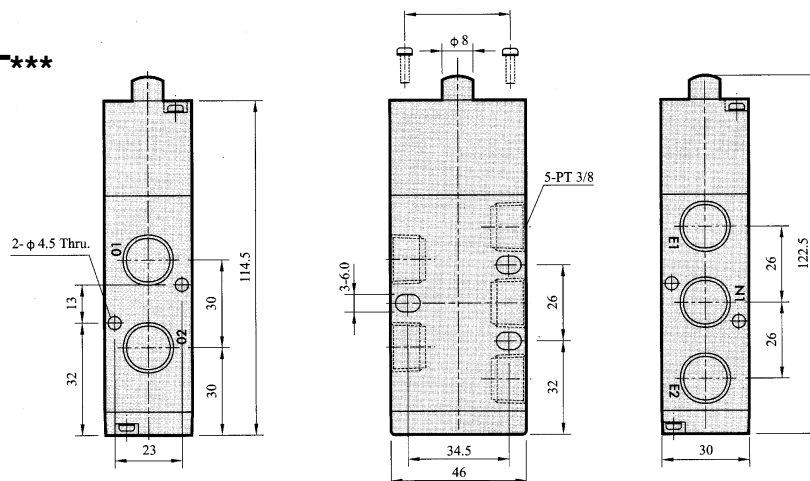


● MECHANICAL VALVES

Unit:mm


● MV-3052-EB-25

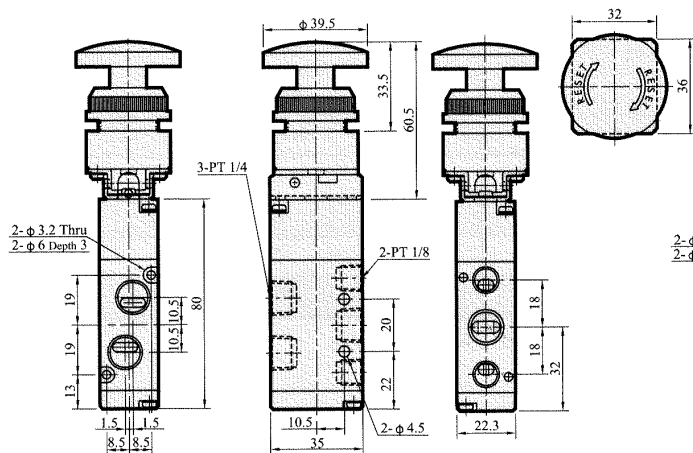


● MV-3052-LB-25

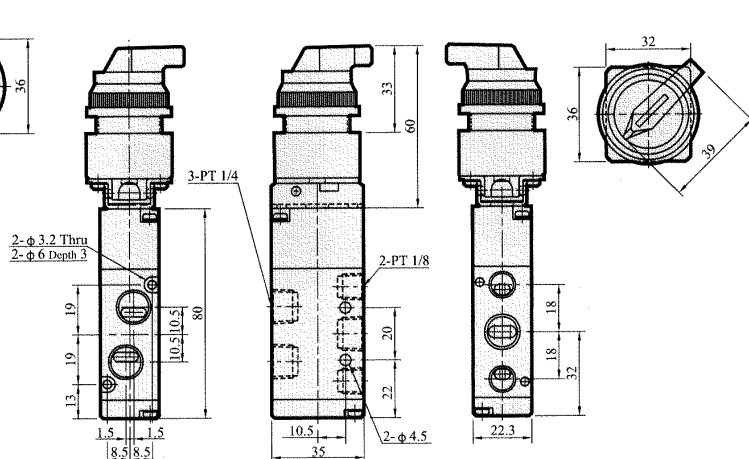

● MV-3052-PP-25

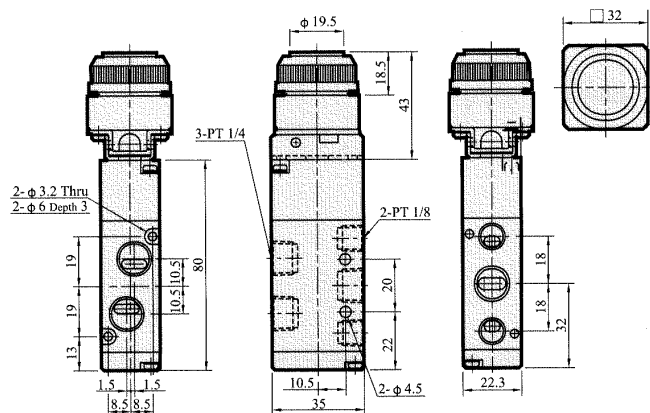

● MV-3052-PB-25

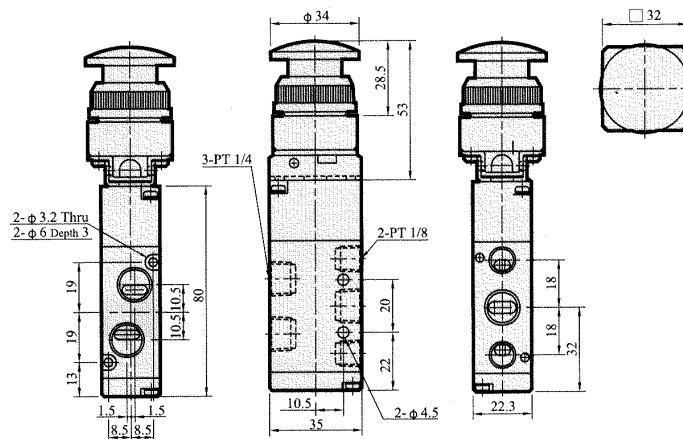

● MV-3052-TB-25

